



TYPE: Sepitam-PS224G-DF

26 Port Gigabit PoE Switch with 24 Gigabit PoE Ports and 2 Gigabit Fiber Ports



Description:

The 26-Port gigabit PoE ports provide fast connection to servers or the backplane of the gigabit speed. It features with PoE (Power Over Ethernet) function through different power levels of PoE power supply, that is it can supply the 48V DC power to the PD remote devices (e.g. IP Phone, WLAN AP, Security, Bluetooth AP etc.) via a network cable, in order that realizing the power supply for remote PD devices. As the power supply PSE (Power Sourcing Equipment) side device, which supports the standard IEEE802.3af/at power standard and single-port power is 15.4W.

This cost-effective **Sepitam-PS224G-DF** is perfectly suitable for security surveillance/ small business/ home use. It comes with excellent lightning-proof capabilities and security features. The product adopts the standard rack metal housing design and is easy to install. **Sepitam-PS224G-DF** is fully compliant with IEEE802.3af/at/ IEEE802.3 10BASE-T Ethernet/ IEEE802.3u 100BASE-TX fast Ethernet/ IEEE 802.3ab 1000BASE-T Ethernet ANSI/IEEE802.3NWay auto-negotiation and IEEE802.3x flow control. This **Sepitam-PS224G-DF** comes with the PoE green power saving application mode.

Product features:

- ◆ Supply power to 5 classes Ethernet wireless access point (AP) and network surveillance cameras (PoE)
- ◆ Port1 to Port24 compatible with IEEE802.3af/at standard power
- ◆ Supply (Maximum power of each port is 15.4W)
- ◆ 24x 10/100 /1000Mbps automatic adjustment RJ45 PoE ports, 2x 10/100 /1000Mbps SFP fiber uplink ports
- ◆ Meets the standards of the IEEE 802.3af/at/ IEEE 802.3/ IEEE 802.3u/ IEEE 802.3x/ IEEE 802.3ab standard
- ◆ The packet forwarding speed of the wire-speed port is 1.488Mbps
- ◆ Network port has lightning-proof function (AC power port: differential mode +/-2kV, common mode +/-4kV)
- ◆ All ports support wire-speed switching, frame size within the range of 64 to 1536 can achieve wire-speed
- ◆ 1U Rack mounted design, easy to install and use
- ◆ Automatic adjustment, plug and play, no need software and protocol conversion




Product Name	26 Port Gigabit PoE Switch with 24 Gigabit PoE Ports 15.4W
Product Model	Sepitam-PS224G-DF
Connector Type	24x 10/100/1000M copper cable RJ45 PoE ports(All ports support MDI/MDIX automatic adjustment); 2x 10/100 /1000Mbps SFP fiber uplink ports
Forwarding Mode	1000M line speed forwarding; Packet Length: 10K; Packet Buffer: 4.1M
Network Medium	10BASE-T: Cat3,4,5 UTP(≤100 meters); 100BASE-TX: Cat5 or more UTP(≤100 meters); 1000BASE-TX: Cat5 or more UTP(≤100 meters);
Performance Specifications	Backplane Bandwidth: 52Gbps Network Delay: less than 20 microsecond Packet Buffer: 8M Address Database size: 1000 MTBF: 190,000 hours (about 21 years)
PoE Description	IEEE 802.3af/at, each port power is 15.4W; Port1 to Port24 support PoE power; The even number Port(1/3/5/7/9/11/13/15/17/19/21/23) is end-span(1/2+, 3/6- line pair) power supply, the odd number port(2/4/6/8/10/12/14/16/18/20/22/24) is mid-span(4/5+, 7/8- line pair) power supply
PoE Power	Port output power is 15.4W (IEEE802.3af/at)
Power Supply Type	End-span type (Mid-span optional)
Network Protocols	IEEE 802.3; IEEE 802.3u; IEEE 802.3ab; IEEE 802.x Flow Control
LED Indicator Status	Power, Network, PoE working status
Power	IEEE802.3af/at standard, each port power is 15.4W, single PoE output :30W(max) , total power is 400W
Voltage	Input: AC100~240V 50/ 60Hz
Dimension/ Weight	Dimension (LxWxH): 440 x 290 x 44.5mm; Weight:4600gr
Working Environment	Working temperature: -20°C~55°C; Storage temperature: -20°~ 75°C; Working Humidity: 10%~90%, no condensation; Storage Humidity: 5% ~ 90%, no condensation; Working Altitude: 3000 meters (10,000ft); Storage Altitude: 3000 meters (10,000ft)
Radiation	CE mark, commercial FCC Part 15 Class B VCCI Class B EN 55022 (CISPR 22), Class B
Safety	CE Mark ,commercial CE/LVD EN60950,RoHS



Technical Specification of Sepitam-PS224G-DF

شرکت سپیتام

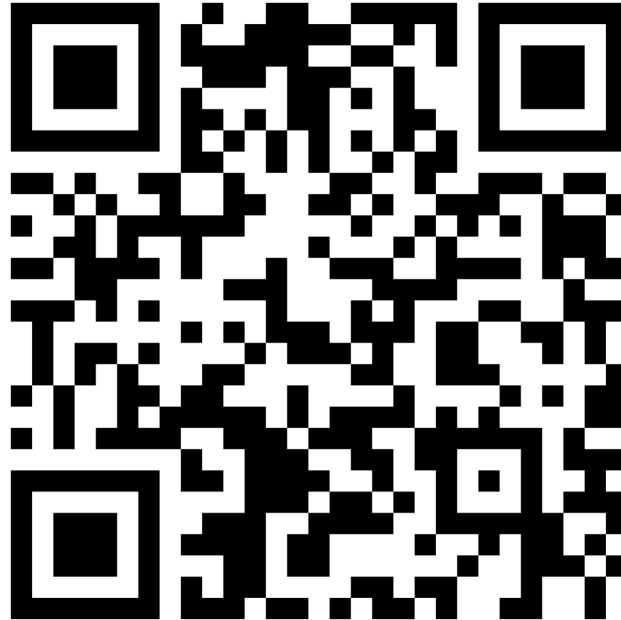

www.Sepitam.com