



## Technical Specification of Sepitam-PI104G-G-bt 4 Ports 90W Full Gigabit Industrial POE Switch 4\*GE POE +1\*GE Industrial POE Switch



### Overview :

The Sepitam-PI104G-G-90 is a 10/100/1000M 90W industrial POE switch. It has 4\*10/100/1000M POE ports and 1\*10/100/1000M RJ-45 uplink port, Ports 1-4 can support IEEE 802.3af/at/bt POE standard, single port max—POE power up to 90W. As a POE power supply device, it can automatically detect and recognize the power-receiving equipment that meets the standard and supply power through the network cable. Through a network cable, it can supply power to POE terminal equipment such as wireless AP, web cameras, VoIP phones, and industrial sensors. It also meets the network environment that needs a high-density POE power supply. It is suitable for intelligent transportation, rail transit, electric power, mining, metallurgy, and green energy. Industrial scenes such as construction set up a cost-effective and stable communication network. Unmanaged model, plug and play, no configuration, easy to use.

### Feature :

- 4\*10/100/1000M POE ports+ 1\*10/100/1000M RJ-45 uplink port Industrial POE Switch, port 1-4 support IEEE 802.3af/at/bt;
- POE port support af/at/bt intelligent recognition. Maximum power: 90W/port;
- POE default: 1, 2(+)/3, 6(-),
- Operation TEMP:-40~85°C
- Input voltage: DC48-57V, Redundant dual power 65-bit industrial terminals;
- IP protection level: IP40; Rail-type installation;



## TECHNICAL SPECIFICATION

Model	Sepitam-PI104G-G-bt
Interface	4*10/100/1000Base-T POE ports (Data/Power) 1*10/100/1000Base-T RJ-45 uplink port (Data) 2 set of V+, V- redundant DC power interface (6 Pin Phoenix terminal)
POE Port	Port 1-4
Network Protocol	IEEE802.3 10BASE-T; IEEE802.3i 10Base-T; IEEE802.3u 100Base-TX; IEEE802.3ab 1000Base-T; IEEE802.3z 1000Base-X; IEEE802.3x
POE Standard	IEEE802.3af/at/bt
Ethernet Port Feature	Port 1-4 support 10/100/1000Base-T, auto-sensing, Full/half duplex MDI/MDI-X self-adaption
Forwarding Mode	Store and Forward
Switching Capacity	10Gbps
Forwarding Rate@64byte	7.44Mpps
MAC	4K
Buffer Memory	1M
Jumbo Frames	10K
MTBF	100000 hours
Twisted Pair Transmission	10BASE-T: Cat3,4,5 UTP ( $\leq 100$ meter) 100BASE-TX: Cat5 or later UTP ( $\leq 100$ meter) 1000BASE-T: Cat5e or later UTP ( $\leq 100$ meter)
Power Supply Pin	Default: 1/2 (+), 3/6 (-)
Working Voltage	48-57VDC; 6 PIN industrial phoenix terminal, anti-reverse protection.




Max Power Per Port	90W; IEEE802.3af/at/bt	
Power Consumption	Standby:<2W; Full load:<60W	Standby:<2W; Full load:<120W
LED Indicator	Power indicator: PWR (Green); Network indicator: 1-4(Link/Act)/ (Green),5(Link/Act)/ (Green); POE indicator: POE (Orange)	
Operation TEMP / Humidity	-40~+75°C; 5%~90% RH Non condensing	
Storage TEMP / Humidity	-40~+85°C; 5%~95% RH Non condensing	
Dimension (L*W*H)	118*86*39mm	
Net /Gross Weight	<0.7kg/<1.0kg	
Installation	Desktop, 35mm DIN rail	
Lightning protection / protection level	Lightning protection: 6KV 8/20us; Protection level: IP40 IEC61000-4-2(ESD): ±8kV contact discharge, ±15kV air discharge IEC61000-4-3(RS):10V/m(80~1000MHz) IEC61000-4-4(EFT): power cable: ±4kV; data cable: ±2kV IEC61000-4-5(Surge): power cable:CM±4kV/DM±2kV; data cable: ±4kV IEC61000-4-6(radio frequency transmission):10V(150kHz~80MHz) IEC61000-4-8(power frequency magnetic field):100A/m;1000A/m ,1s to 3s IEC61000-4-9(pulsed magnet field):1000A/m IEC61000-4-10(damped oscillation):30A/m 1MHz IEC61000-4-12/18(shockwave):CM 2.5kV, DM 1kV IEC61000-4-16(common-mode transmission):30V; 300V,1s FCC Part 15/CISPR22(EN55022): Class A IEC61000-6-2(Common Industrial Standard)	
Certification	CCC; CE mark, commercial; CE/LVD EN60950;FCC Part 15 Class B; RoHS;	



# Technical Specification of Sepitam-PI104G-G-bt

شرکت سپیتام

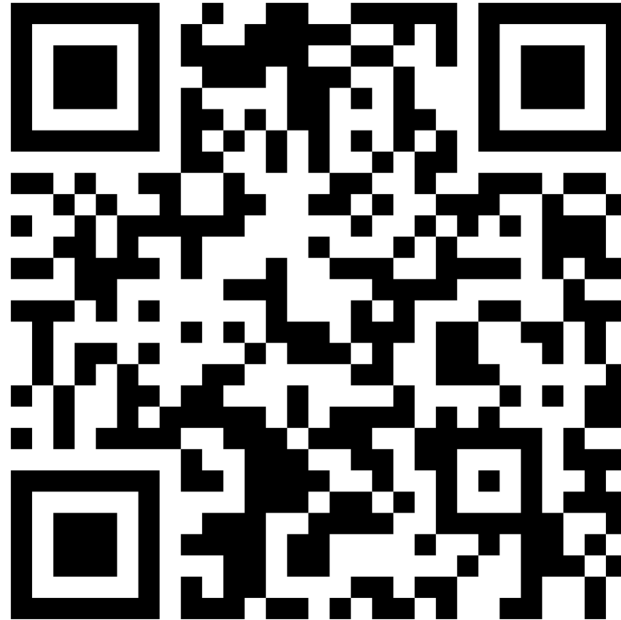

[www.Sepitam.com](http://www.Sepitam.com)