



## Optical Video Transceiver

### TYPE: Sepitam-4V1bD1A-T/R

#### Four Channel Video Series



### Product Introduction

The Four Channel Analog Video, One channel reverse bidirectional Data, and One channel reverse Audio of our products, use advanced analog and digital technologies for pursuing high performance bidirectional data transmission over fiber optic. The transceiver can send signals more than 100 kilometers on fiber.

This link works properly in critical (very high and too low) temperature environments and work for years without any degradation in expected quality.

This good is fully transparent from front-end video device perspective. Just one fiber core is used to transmit all mentioned signals which can be any kind of fiber cables. The equipment also adopt non-compressed analog (video composite) signal in PAL or NTSC mode.

This Optical Transceiver is easily monitored by virtue of LED indication of working status and without any electrical or optical regulation on site.

This product is released in standalone and rack-mount (2U/4U) packages.

### Fundamental Features:

- ◆ FC and SC interface as fiber optic connector for your choice
- ◆ Stand-alone and Rack-mount (2U/4U Card-type) for your choice
- ◆ Sampling rate up to 20MSPS and uncompressed video transmission (NRZ method)
- ◆ supporting any kind of analog video signal
- ◆ Compatible with NTSC,PAL, and SECAM video signals
- ◆ LED indication of working status for monitoring real-time operation
- ◆ Modular industrial design ensuring reliability and flexibility

### Environmental Aspects

- ◆ Working Temperature: -20 °C~+70 °C
- ◆ Storage Temperature: -30 °C~+75 °C
- ◆ Relative humidity: 0~95% (Non-condensing)
- ◆ Input Voltage: AC85-260v/50Hz
- ◆ MTBF: More than 100000 hours
- ◆ Internal power consumption: Less than 2A on +5 volt

**Link Budget:****1- Multi mode transmitters:**

| Fiber Type | Lose       | Maximum Transmission Distance | Link power     | Wavelength   |
|------------|------------|-------------------------------|----------------|--------------|
| 62.5 um    | 1 (dBm/Km) | 500(meter)                    | -19.5~-16(dBm) | 850、1310(nm) |

**2- Single mode transmitters:**

| Fiber Type | Lose         | Maximum Transmission Distance | Link power | Wavelength    |
|------------|--------------|-------------------------------|------------|---------------|
| 9/125um    | 0.5 (dBm/Km) | 20(Kilo meter)                | -8~-5(dBm) | 1310,1550(nm) |
| 9/125um    | 0.5 (dBm/Km) | 40(Kilo meter)                | -5~-3(dBm) | 1310、1550(nm) |
| 9/125um    | 0.25(dBm/Km) | 60(Kilo meter)                | -3~-1(dBm) | 1310、1550(nm) |
| 9/125um    | 0.2(dBm/Km)  | 100(Kilo meter)               | 0~+3(dBm)  | 1310、1550(nm) |

**Video Characteristics:**

| In-terfa-<br>ce | Input/ Output<br>Impedance | Input/ Output<br>Voltage              | Band-<br>width | Sampling                              | Differential gain                           | Differential phase                          | SN<br>R              |
|-----------------|----------------------------|---------------------------------------|----------------|---------------------------------------|---------------------------------------------|---------------------------------------------|----------------------|
| BNC             | 75Ω<br>(unbalanced)        | Peak value = 1 V<br>Max value = 1.2 V | 10MHz          | Up to 20MHz<br>high speed<br>sampling | (10%-90% APL)<br>DG < 1% (Typical<br>value) | (10%-90%APL)<br>DP <0.8° (Typical<br>value) | S/N<br>≥<br>70d<br>B |

**Audio Characteristics:**

| Direc-<br>tion | Interface<br>terminal               | Input/ Output<br>Impedance        | Input/ Output<br>Voltage | Bandwidth      | Sampling<br>rate | Input/ Output<br>electric power | Nonlinear distor-<br>tion coefficient | S<br>N<br>R              |
|----------------|-------------------------------------|-----------------------------------|--------------------------|----------------|------------------|---------------------------------|---------------------------------------|--------------------------|
| Reverse        | Standard<br>industrial<br>connector | 600Ω<br>(balanced/<br>unbalanced) | Peak value = 2<br>V      | 20Hz~<br>20kHz | 58.6 KHz         | 0(dBm)                          | ≤ 1%                                  | S/<br>N<br>≥<br>85<br>dB |

**Data Characteristics:**

| Direction             | Interface terminal               | Controlling Equipment                                                                            | Type of data                               |
|-----------------------|----------------------------------|--------------------------------------------------------------------------------------------------|--------------------------------------------|
| Transmitter / Reverse | Standard industrial<br>connector | PTZ decoder, Keyboard, data interface of Matrix,<br>High speed dome camera, industrial equipment | RS-485 (2 lines),<br>RS232,RS422 and so on |



**1- RS232Aspects:**

**2- RS485/RS422 Aspects:**

| Rate of RS-232 | Bit rate error   | Data Agreement                                                | Type of data   |
|----------------|------------------|---------------------------------------------------------------|----------------|
| 0 -118 Kbps    | Less than 10E-12 | data agreement fully supporting all kinds of RS-232 agreement | point to point |

| Rate of RS-485/422 | Bit rate error   | Maximum number of nodes | Maximum transmission distance | Data Agreement                                                                         | Direction             | Type of data                                         |
|--------------------|------------------|-------------------------|-------------------------------|----------------------------------------------------------------------------------------|-----------------------|------------------------------------------------------|
| 0 -255 Kbps        | Less than 10E-12 | 128                     | 1200 meter                    | Fully supporting all kinds of RS-485/RS-422 agreement, including the Modbus agreements | Transmitter / Reverse | Support point to point, support point to more points |

**Applications:**


- ◆ CCTV and Security protection system
- ◆ Tele-Communication System
- ◆ Intelligent transportation supervisory system (ITS)
- ◆ Telemedicine
- ◆ E-learning& Campus monitoring
- ◆ Skyscraper Security Protection system
- ◆ Military Tele-Com projects
- ◆ Paging systems in big arena and stadium



# Technical Specification of

## Sepitam-4V1bD1A-T/R

شرکت سپیتام

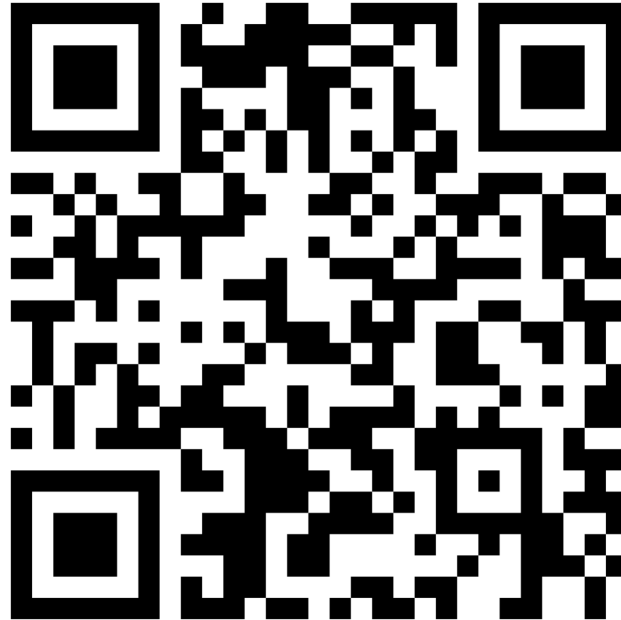

[www.Sepitam.com](http://www.Sepitam.com)