

SEPITAM

ONE STEP SMARTER

www.sepitam.com

SEPITAM
SFP1G-MM-DX-2KM



TYPE:

Sepitam-SFP1G-MM-DX

Sepitam SFP optical transceiver modules support data transmission rates ranging from 1Gbps to 10Gbps. These modules operate at basic and WDM wavelengths and are available in both industrial and non-industrial grades. They are compatible with single-mode and multi-mode optical fibers, covering transmission distances from 20 km to 120 km.



- ▶ TYPE: Sepitam-SFP1G-MM-DX
- ▶ RoHS Compliant 1.25Gbps 850nm 550m Multimode
- ▶ SFP Optical Transceiver

▶ Description:

The SFP transceivers are high performance, cost effective modules supporting data-rate of 1.25Gbps and 550m transmission distance with MMF.

The transceiver consists of three sections: a VCSEL laser transmitter, a PIN photodiode integrated with a trans-impedance preamplifier (TIA) and MCU control unit. All modules satisfy class I laser safety requirements.

The transceivers are compatible with SFP Multi-Source Agreement (MSA) and SFF-8472. For further information, please refer to SFP MSA.

▶ Properties:


- 850nm VCSEL laser and PIN photodetector
- Up to 1.25Gbps data rate operation
- Compliant with SFP MSA and SFF-8472 with duplex LC receptacle
- Digital Diagnostic Monitor Interface
- 500m transmission with 50/125µm MMF
- 300m transmission with 62.5/125µm MMF
- Very low EMI and excellent ESD protection
- +3.3V single power supply
- RoHS compliant
- Case operating temperature:
 - Commercial: 0°C to +70°C
 - Extended: -10°C to +80°C
 - Industrial: -40°C to +85°C



► Applications:

- Gigabit Ethernet
- Fiber Channel
- Switch to Switch interface
- Switched backplane applications
- Router/Server interface
- Other optical transmission systems

► Functional Diagram:

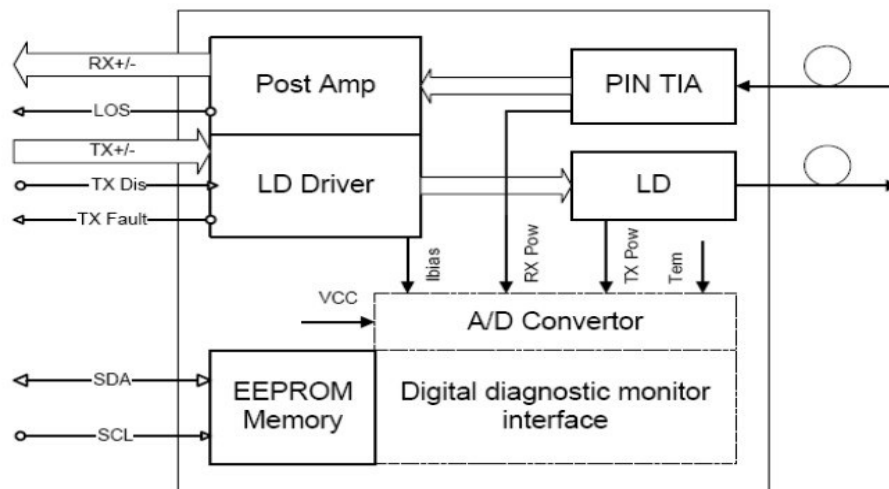



► Absolute Maximum Ratings:

Parameter	Symbol	Min.	Max.	Unit	Note
Supply Voltage	Vcc	-0.5	3.6	V	–
Storage Temperature	–	-40	85	°C	–
Relative Humidity	–	5	85	%	–

► General Operating Characteristics:

Parameter		Symbol	Min.	Type	Max.	Unit	Notes
Data Rate	Gigabit Ethernet	–	–	1.25	–	Gb/s	–
	Fiber Channel	–	–	1.0625	–		
Supply Voltage		Vcc	3.1	3.3	3.5	V	–
Supply Current		Icc	–	–	220	mA	–
Operating Case Temperature		Tc	0	–	70	°C	–
			-10	–	80		
			-45	–	85		



► Electrical Input/ Output Characteristics

► Transmitter:

Parameter		Symbol	Min.	Type	Max.	Unit	Notes
Diff. Input Voltage Swing		—	300	—	1600	mVpp	1
Tx Disable Input	H	V_{IH}	2.0	—	$V_{CC}+0.3$	V	—
	L	V_{IL}	0	—	0.8		
Tx Fault Output	H	V_{OH}	2.0	—	$V_{CC}+0.3$	V	2
	L	V_{OL}	0	—	0.8		
Input Diff. Impedance		Z_{in}	-	100	—	Ω	—

► Receiver:

Parameter		Symbol	Min.	Type	Max.	Unit	Notes
Diff. Output Voltage Swing		—	400	—	1000	mVpp	3
Rx LOS Output	H	V_{OH}	2.0	—	$V_{CC}+0.3$	V	2
	L	V_{OL}	0	—	0.8		

- Note 1) TD+/- are internally AC coupled with 100 Ω differential termination inside the module.
- Note 2) Tx Fault and Rx LOS are open collector outputs, which should be pulled up with 4.7k to 10k Ω resistors on the host board. Pull up voltage between 2.0V and $V_{CC}+0.3V$.
- Note 3) RD+/- outputs are internally AC coupled, and should be terminated with 100 Ω (differential) at the user SERDES.



► Optical Characteristics:

► Transmitter

Parameter	Symbol	Min.	Type	Max.	Unit	Notes
Ave. Output Power (Enable)	Po	-10	—	0	dBm	1
Total Jitter	1.25G	—	—	0.431	UI	—
Extinction Ratio	ER	9	—	—	dB	1
Rise/Fall Time (20%-80%)	Tr-Tf	—	—	0.26	ns	2
Wavelength Range	—	840	850	860	nm	—
Spectral Width (RMS)	—	—	—	0.65	nm	—
Output Optical Eye	Compliant with IEEE802.3 z (class 1 laser safety)					


► Receiver

Parameter	Symbol	Min.	Type	Max.	Unit	Notes
Operating Wavelength	—	770	—	860	nm	—
Sensitivity	Pimin	—	—	-18	dBm	3
Min. Overload	Pimax	0	—	—	dBm	3
Total Jitter	1.25G	—	—	0.749	UI	—
LOS Assert	Pa	-35	—	—	dBm	—
LOS De-assert	Pd	—	—	-19	dBm	—
LOS Hysteresis	Pd-Pa					

- Note 1) Measured at 1250 Mb/s with PRBS 2 - 1 NRZ test pattern.
- Note 2) Unfiltered, measured with a PRBS 2 - 1 test pattern @1.25Gbps
- Note 3) Measured at 1250 Mb/s with PRBS 2 - 1 NRZ test pattern for BER < 1x10⁻¹²



► Pin Definitions and Functions:

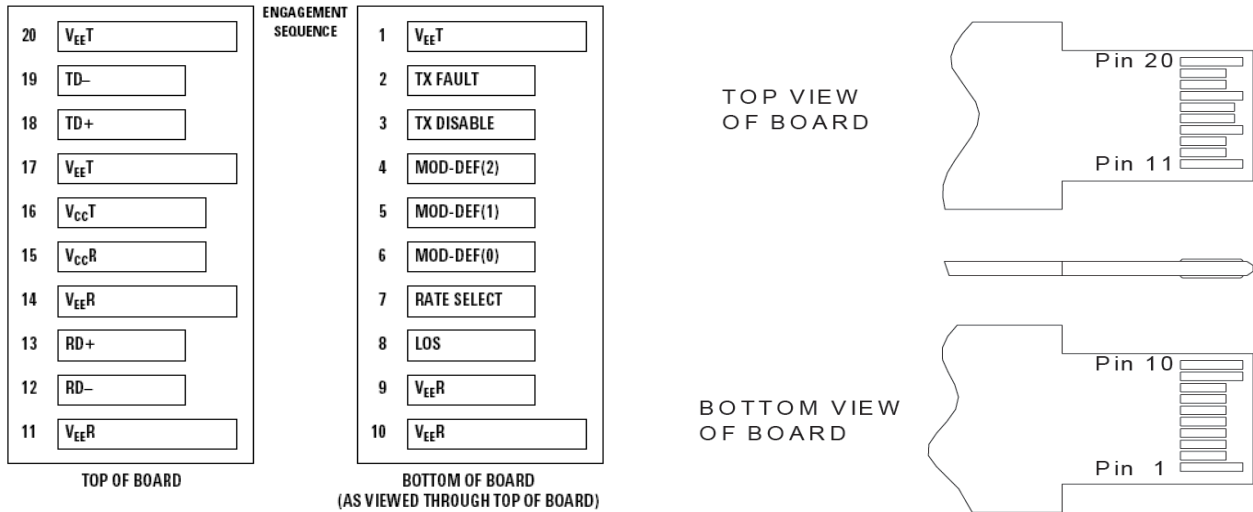

PIN#	Name	Function	Notes
1	VeeT	Tx ground	-
2	Tx Fault	Tx fault indication, Open Collector Output, active "H"	1
3	Tx Disable	LVTTL Input, internal pull-up, Tx disabled on "H"	2
4	MOD-DEF2	2 wire serial interface data input/output (SDA)	3
5	MOD-DEF1	2 wire serial interface clock input (SCL)	3
6	MOD-DEF0	Model present indication	3
7	Rate select	No connection	-
8	LOS	Rx loss of signal, Open Collector Output, active "H"	4
9	VeeR	Rx ground	-
10	VeeR	Rx ground	-



PIN#	Name	Function	Notes
11	VeeR	Rx ground	-
12	RD-	Inverse received data out	5
13	RD+	Received data out	5
14	VeeR	Rx ground	-
15	VccR	Rx power supply	-
16	VccT	Tx power supply	-
17	VeeT	Tx ground	-
18	TD+	Transmit data in	6
19	TD-	Inverse transmit data in	6
20	VeeT	Tx ground	-

- Note 1) When high, this output indicates a laser fault of some kind. Low indicates normal operation. And should be pulled up with a 4.7 – 10KΩ resistor on the host board.
- Note 2) TX disable is an input that is used to shut down the transmitter optical output. It is pulled up within the module with a 4.7 – 10KΩ resistor. Its states are:
 Low (0 – 0.8V): Transmitter on (>0.8, < 2.0V): Undefined
 High (2.0V~Vcc+0.3V): Transmitter Disabled Open: Transmitter Disabled
- Note 3) Mod-Def 0,1,2. These are the module definition pins. They should be pulled up with a 4.7K – 10KΩ resistor on the host board. The pull-up voltage shall be VccT or VccR.
 Mod-Def 0 has been grounded by the module to indicate that the module is present
 Mod-Def 1 is the clock line of two wire serial interface for serial ID
 Mod-Def 2 is the data line of two wire serial interface for serial ID
- Note 4) When high, this output indicates loss of signal (LOS). Low indicates normal operation.
- Note 5) RD+/-: These are the differential receiver outputs. They are AC coupled 100Ω differential lines which should be terminated with 100Ω (differential) at the user SERDES. The AC coupling is done inside the module and is thus not required on the host board.
- Note 6) TD+/-: These are the differential transmitter inputs. They are AC-coupled, differential lines with 100Ω differential termination inside the module. The AC coupling is done inside the module and is thus not required on the host board.




► Diagnostics:

► Diagnostics Specification

Parameter	Range	Unit	Accuracy	Calibration
Temperature	0 to +70 -40 to +85	°C	±3°C	Internal/ External
Voltage	3.0 to 3.6	V	±3%	Internal/ External
Bias Current	2 to 80	mA	±10%	Internal/ External
TX Power	-11 to -1	dBm	±3dB	Internal/ External
RX Power	-25 to 0	dBm	±3dB	Internal/ External

► Typical Interface Circuit

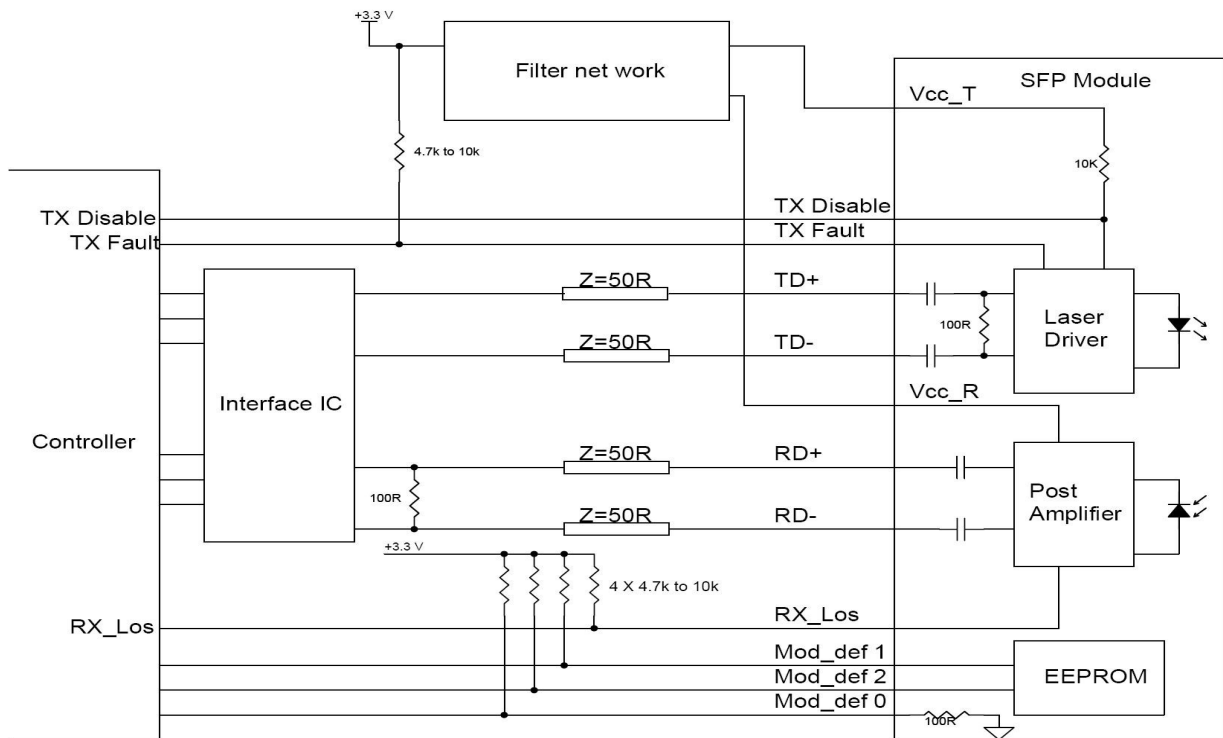

Technical Specification of Sepitam-SFP1G-MM-DX-2KM



www.sepitam.com

Info@sepitam.com