



SEPITAM

ONE STEP SMARTER

www.sepitam.com

SEPLITAM
PS216G-DF-Eco



TYPE:

Sepitam-PS216G-DF-Eco

Sepitam's Economical switches are available in unmanaged and PoE models. The advanced PoE technology simplifies powering a variety of network devices, while these products enhance network scalability and flexibility. Sepitam's cost-effective solutions deliver reliable performance in stable, low-noise environments, striking an ideal balance between quality and affordability. Perfect for small to medium-sized networks, these switches provide a practical and efficient networking solution.



- ▶ TYPE: Sepitam-PS216G-DF-Eco
- ▶ Technical Specification of Sepitam-PS216G-DF-Eco
- ▶ 16*10/100/1000Base-T PoE ports & 2*1000Base-X fiber SFP ports Economical PoE Switch

▶ Description:

Sepitam-PS216G-DF-Eco series is an unmanaged PoE switch, it has 16*10/100/1000Mbps PoE RJ45 ports and 2* 10/100/1000Base-X SFP Uplink Ports, Port 1-16 can support IEEE 802.3af/at standard PoE power supply, and the maximum PoE output power is 300W. As a PoE power supply device, it can automatically detect and recognize the power receiving equipment that meets the standard and supply power through the network cable. It can supply power to PoE terminal equipment such as wireless AP, webcam, VoIP phone, video access control intercom, etc. through network cable to meet the network environment that needs high-density PoE power supply. It is suitable for hotels, campuses, factory quarters and small and medium-sized enterprises to form an economy. Efficient network.

Optimized and customized design and affordable pricing, it best fit for SMB or entry-level enterprise solution. It passed the rigorously testing to deliver excellent performance.

▶ Specifications:

Model	Sepitam-PS216G-DF-Eco
Product	16*10/100/1000Base-T PoE RJ45 Ports & 2* 10/100/1000Base-X SFP Uplink Ports
Features	1-16 port support VLAN mode
Ports	
Network Ports:	18




Model	Sepitam-PS216G-DF-Eco
PoE Port:	16*10/100/1000Base-T PoE RJ45 Ports ; Max. 30W Output of Single PoE Port
Uplink Port:	2* 10/100/1000Base-X SFP Uplink Ports
Power Indicator	Light on: Powering
	Light off: No Power
VLAN Indicator	Green light on: VLAN mode
	Light off: normal mode
Port 1-18 indicator	Light off: Link is disconnected
	Red light on: Powering but data disconnected
	Light flash quickly: Data Transmitting
Standard	
Network Protocol:	IEEE802.3i/802.3u/802.3x/802.3af/802.3ab
Performance	
Switching Capacity:	32 Gbps Full duplex
Packet Forwarding Rate:	1.488Mpps/port
Forwarding Mode:	Store-and-forward
MAC Address Table:	8K
Vlan	Support
Power Over Ethernet	



Model	Sepitam-PS216G-DF-Eco
PoE Standard:	IEEE802.3af, IEEE802.3at
PoE Power Supply	1/2(+),3/6(-)
General	
Power Source:	Bult-in Power Supply
	Input: 110-264V AC, 50/60Hz
PoE Power Budget:	300W
Power Consumption:	<5W
ESD	Air discharge: 1.5KV
	Contact discharge: 1.5KV
Anti-Thunder Level	Common mode: 4KV
Anti-Thunder Level	Differential mode: 2KV
Working Temperature:	-10 ~40 °C
Humidity:	10%-95% , non-condensing
Storage Temperature:	-40 ~70 °C
Color	Black
Weight:	1.9kg (not include input cable & packaging)
Dimension (L×W×H)	312*185*46mm (L*W*H)

Technical Specification of Sepitam-PS216G-DF-Eco

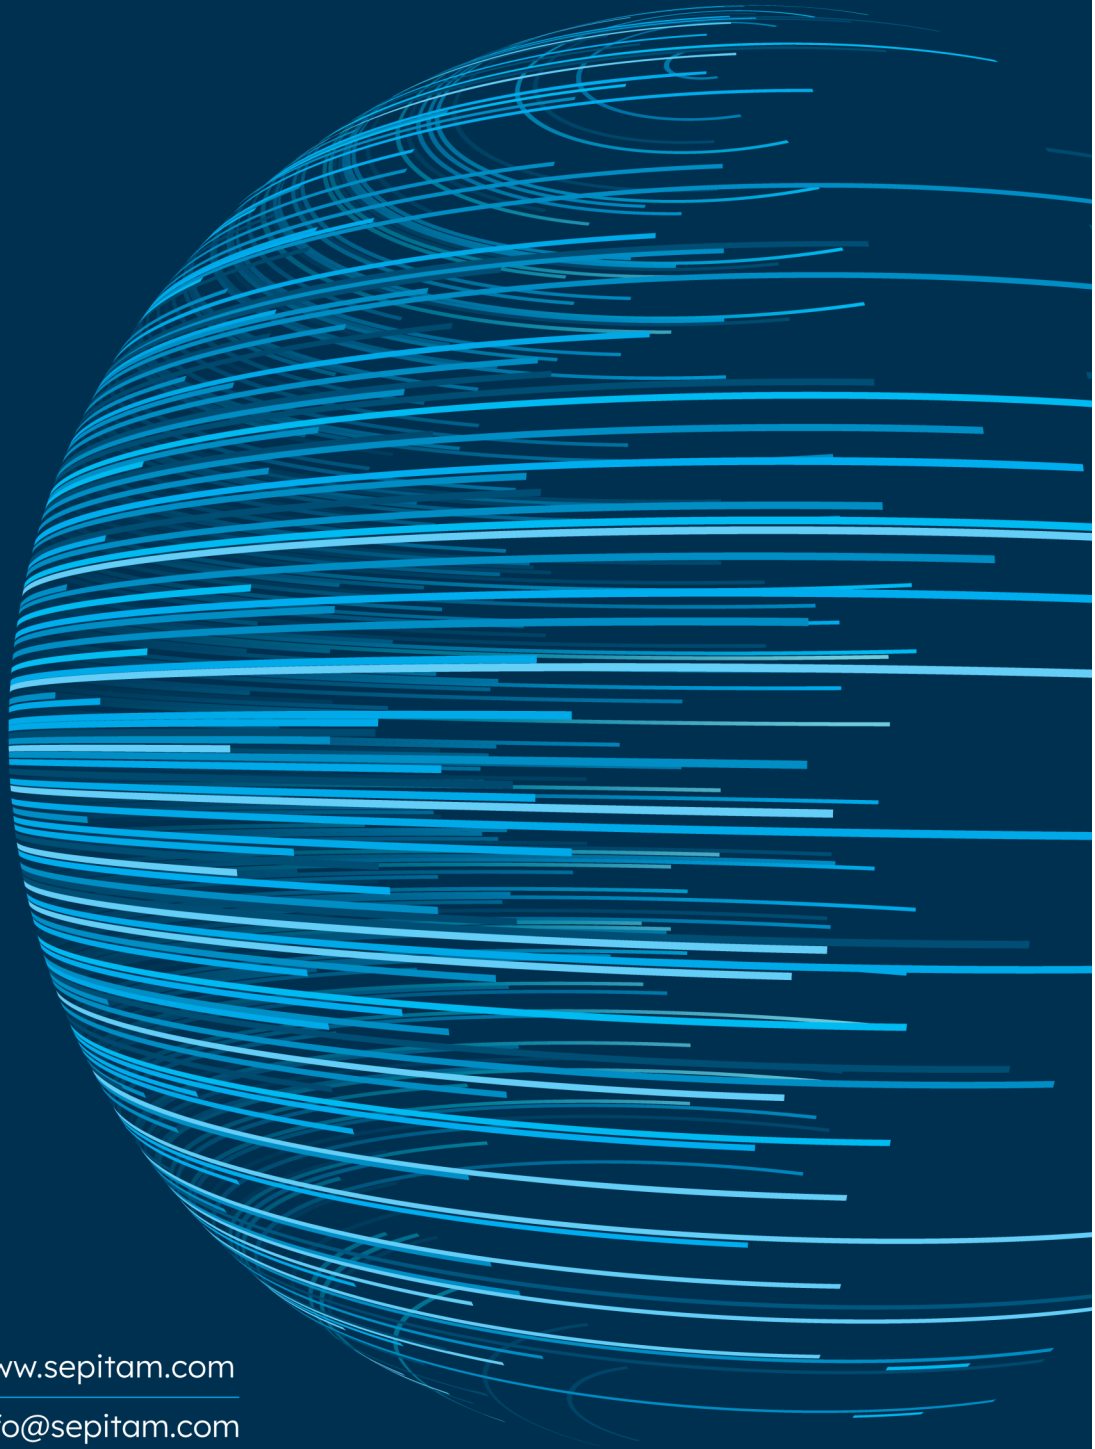

www.sepitam.com

Info@sepitam.com