



Sepitam-SFP1G-MM-DX

**RoHS Compliant 1.25Gbps 850nm 550m Multimode,
SFP Optical Transceiver**



Product Description:

The SFP transceivers are high performance, cost effective modules supporting data-rate of 1.25Gbps and 550m transmission distance with MMF.

The transceiver consists of three sections: a VCSEL laser transmitter, a PIN photodiode integrated with a trans-impedance preamplifier (TIA) and MCU control unit. All modules satisfy class I laser safety requirements.

The transceivers are compatible with SFP Multi-Source Agreement (MSA) and SFF-8472. For further information, please refer to SFP MSA.

Features:

- ◆ 850nm VCSEL laser and PIN photodetector
- ◆ Up to 1.25Gbps data rate operation
- ◆ Compliant with SFP MSA and SFF-8472 with duplex LC receptacle
- ◆ Digital Diagnostic Monitor Interface
- ◆ 500m transmission with 50/125 μ m MMF
- ◆ 300m transmission with 62.5/125 μ m MMF
- ◆ Very low EMI and excellent ESD protection
- ◆ +3.3V single power supply
- ◆ RoHS compliant
- ◆ Case operating temperature

Commercial: 0°C to +70°C

Extended: -10°C to +80°C


Industrial: -40°C to +85°C



Applications:

- ◆ Gigabit Ethernet
- ◆ Fiber Channel
- ◆ Switch to Switch interface
- ◆ Switched backplane applications
- ◆ Router/Server interface
- ◆ Other optical transmission systems

Functional Diagram:

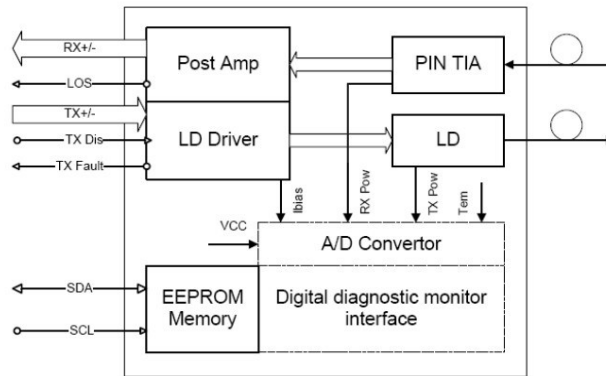

Ordering information:

Product part Number	Data Rate (Mbps)	Media	Wave-length (nm)	Transmission Distance (km)	Temperature Range (Tcase) (°C)	
Sepitam-SFP1G-MM-DX-20KM	1250	Multi mode fiber	850	<2	0~70	commercial
Sepitam-SFP1G-MM-DX-20KM	1250	Multi mode fiber	850	<2	-10~80	extended
Sepitam-SFP1G-MM-DX-20KM	1250	Multi mode fiber	850	<2	-45~85	industrial



Absolute Maximum Ratings:

Parameter	Symbol	Min.	Max	Unit	Notes
Supply Voltage	V _{cc}	-0.5	3.60	V	–
Storage Temperature	–	-40	85	°C	–
Relative Humidity	–	5	85	%	–

Note: Stress in excess of the maximum absolute ratings can cause permanent damage to the module.

General Operating Characteristics:

Parameter	Symbol	Min.	Type	Max.	Unit	Notes
Data Rate	Gigabit Ethernet	–	1.25	–	Gb/s	–
	Fiber Channel	–	1.0625	–		
Supply Voltage	V _{cc}	3.1	3.3	3.5	V	–
Supply Current	I _{cc}	–	–	220	mA	–
Operating Case Temperature	T _c	0	–	70	°C	–
		-10	–	80		
		-45	–	85		

Electrical Input/Output Characteristics:

- Transmitter:**

Parameter	Symbol	Min.	Type	Max.	Unit	Notes
Diff. Input Voltage Swing	–	300	–	1600	mV _{pp}	1
Tx Disable Input	H	V _{IH}	2.0	V _{cc} +0.3	V	–
	L	V _{IL}	0	0.8		
Tx Fault Output	H	V _{OH}	2.0	V _{cc} +0.3	V	2
	L	V _{OL}	0	0.5		
Input Diff. Impedance	Z _{in}	–	100	–	Ω	–



- Receiver:**

Parameter	Symbol	Min.	Type	Max.	Unit	Notes	
Diff. Output Voltage Swing	–	400	–	1000	mVpp	3	
Rx LOS Output	H	V_{OH}	2.0	–	$V_{CC}+0.3$	V	2
	L	V_{OL}	0	–	0.8		

Note 1) TD+/- are internally AC coupled with 100Ω differential termination inside the module.

Note 2) Tx Fault and Rx LOS are open collector outputs, which should be pulled up with 4.7k to 10kΩ resistors on the host board. Pull up voltage between 2.0V and $V_{CC}+0.3V$.

Note 3) RD+/- outputs are internally AC coupled, and should be terminated with 100Ω (differential) at the user SERDES.

Optical Characteristics:

- Transmitter**

Parameter	Symbol	Min.	Type	Max.	Unit	Notes
Ave. Output Power (Enable)	P_o	-10	–	0	dBm	1
Total Jitter	1.25G	–	–	0.431	UI	–
Extinction Ratio	ER	9	–	–	dB	1
Rise/Fall Time (20%-80%)	Tr-Tf	–	–	0.26	ns	2
Wavelength Range	–	840	850	860	nm	–
Spectral Width (RMS)	–	–	–	0.65	nm	–
Output Optical Eye	Compliant with IEEE802.3 z (class 1 laser safety)					



Receiver:


Parameter	Symbol	Min.	Type	Max.	Unit	Notes
Operating Wavelength	—	770	—	860	nm	—
Sensitivity	Pimin	—	—	-18	dBm	3
Min. Overload	Pimax	0	—	—	dBm	3
Total Jitter	1.25G	—	—	0.749	UI	—
LOS Assert	Pa	-35	—	—	dBm	—
LOS De-assert	Pd	—	—	-19	dBm	—
LOS Hysteresis	Pd-Pa	0.5	—	6	dB	—

Note 1) Measured at 1250 Mb/s with PRBS 2⁷ – 1 NRZ test pattern.

Note 2) Unfiltered, measured with a PRBS 2⁷-1 test pattern @1.25Gbps

Note 3) Measured at 1250 Mb/s with PRBS 2⁷ – 1 NRZ test pattern for BER < 1x10⁻¹²

Pin Definitions and Functions:

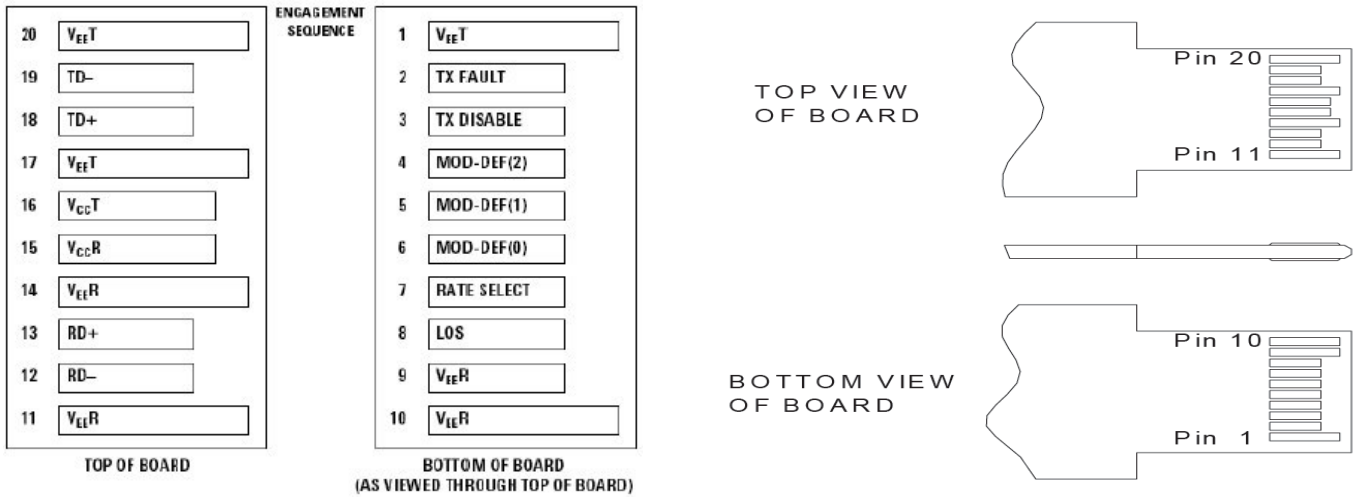



PIN #	Name	Function	Notes
1	VeeT	Tx ground	–
2	Tx Fault	Tx fault indication, Open Collector Output, active “H”	Note 1
3	Tx Disable	LVTTL Input, internal pull-up, Tx disabled on “H”	Note 2
4	MOD-DEF2	2 wire serial interface data input/output (SDA)	Note 3
5	MOD-DEF1	2 wire serial interface clock input (SCL)	Note 3
6	MOD-DEF0	Model present indication	Note 3
7	Rate select	No connection	–
8	LOS	Rx loss of signal, Open Collector Output, active “H”	Note 4
9	VeeR	Rx ground	–
10	VeeR	Rx ground	–
11	VeeR	Rx ground	–
12	RD-	Inverse received data out	Note 5
13	RD+	Received data out	Note 5
14	VeeR	Rx ground	–
15	VccR	Rx power supply	–
16	VccT	Tx power supply	–
17	VeeT	Tx ground	–
18	TD+	Transmit data in	Note 6
19	TD-	Inverse transmit data in	Note 6
20	VeeT	Tx ground	–

Note 1) When high, this output indicates a laser fault of some kind. Low indicates normal operation. And should be pulled up with a 4.7 – 10K Ω resistor on the host board.

Note 2) TX disable is an input that is used to shut down the transmitter optical output. It is pulled up within the module with a 4.7 – 10K Ω resistor. Its states are:

Low (0 – 0.8V): Transmitter on (>0.8, < 2.0V): Undefined

High (2.0V~Vcc+0.3V): Transmitter Disabled Open: Transmitter Disabled

Note 3) Mod-Def 0,1,2. These are the module definition pins. They should be pulled up with a 4.7K – 10K Ω resistor on the host board. The pull-up voltage shall be between 2.0V~Vcc+0.3V.

Mod-Def 0 has been grounded by the module to indicate that the module is present

Mod-Def 1 is the clock line of two wire serial interface for serial ID

Mod-Def 2 is the data line of two wire serial interface for serial ID

Note 4) When high, this output indicates loss of signal (LOS). Low indicates normal operation.



Note 5) RD+/-: These are the differential receiver outputs. They are AC coupled 100Ω differential lines which should be terminated with 100Ω (differential) at the user SERDES. The AC coupling is done inside the module and is thus not required on the host board.


Note 6) TD+/-: These are the differential transmitter inputs. They are AC-coupled, differential lines with 100Ω differential termination inside the module. The AC coupling is done inside the module and is thus not required on the host board.

Diagnostics:

Diagnostics Specification

Parameter	Range	Unit	Accuracy	Calibration
Temperature	0 to +70 -40 to +85	°C	±3°C	Internal/ External
Voltage	3.0 to 3.6	V	±3%	Internal/ External
Bias Current	2 to 15	mA	±10%	Internal/ External
TX Power	-13 to 1	dBm	±3dB	Internal/ External
RX Power	-21 to 0	dBm	±3dB	Internal/ External

Typical Interface Circuit:

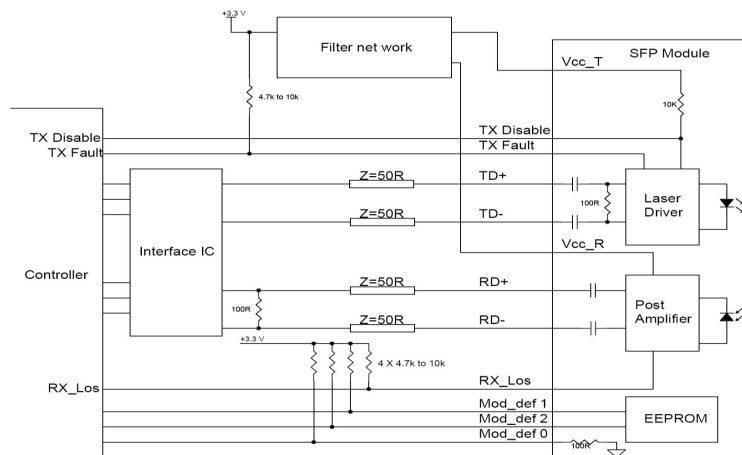



Ordering Information & Related Products

Sepitam-SFP1G-MM-DX	Dual Fiber SFP, 1.25Gbps, 850nm, 550M, without DDM
Sepitam-SFP1G-MM-DX-DDM	Dual Fiber SFP, 1.25Gbps, 850nm, 550M, with DDM



Technical Specification of

TYPE: Sepitam-SFP1G-MM-DX

شرکت سپیتام



www.Sepitam.com