



SEPITAM

ONE STEP SMARTER

www.sepitam.com

SEPLITAM
PS620G-QCDFM



TYPE:

Sepitam-PS620G-QCDFM

Sepitam enterprise-grade switches are available in managed, unmanaged, PoE, and non-PoE models. The advanced PoE technology simplifies powering various network devices, and high-capacity switches enhance network scalability. With robust management features, these switches enable Layer 2 protocol configurations, delivering superior network efficiency and security.



- ▶ TYPE: Sepitam-PS620G-QCDFM
- ▶ Technical Specification of Sepitam-PS620G-QCDFM
- ▶ Management PoE switch with 20*10/100/1000Base-T PoE ports , 4*10/100/1000BaseTX

▶ Description:

Sepitam-PS620G-QCDFM is a gigabit L2+ managed PoE fiber switch. It has 2*100/1000 SFP ports +4*1000M combo port and 20*10/100/1000Base-T RJ45 ports. Port 1-24 can support IEEE 802.3af/at standard PoE power supply, single port PoE power reaches 30W, and the maximum PoE output power is 400W. As a PoE power supply device, it can automatically detect and recognize the power receiving equipment that meets the standard and supply power through the network cable. It can supply power to PoE terminal equipment such as wireless AP, webcam, VoIP phone, building visual access control intercom through network cable, to meet the network environment that needs high-density PoE power supply, suitable for hotels, campuses, parks, supermarkets, scenic spots, Factory quarters and SMB small and medium-sized enterprises form a cost-effective network.

The Sepitam-PS620G-QCDFM has the L2+ full network management, support IPV4/ IPV6 management, static route full line rate forwarding, security protection mechanism, complete ACL/QoS policy and rich VLAN functions, and is easy to manage and maintain. Supports multiple network redundancy protocols STP/RSTP/MSTP (<50ms) and (ITU-T G.8032) ERPS to improve link backup and network reliability. When one-way network fails, communication can be quickly restored to ensure important Uninterrupted communication for applications.

According to the actual application requirements, you can configure multiple application services such as PoE power management, port traffic control, VLAN division, and SNMP through the Web network management mode.



▶ Properties:

- 20*10/100/1000Mbps RJ45 Ports + 4*1000Mbps Combo Ports+ 2*1000Mbps SFP Ports, PoE Switch 1-24 ports support IEEE 802.3af/at;
- PoE port support IEEE 802.3af/at intelligent recognition. Standard power is 15.4W/port, Maximum power: 30W/port;
- Only support 1,2(+)/3,6(-);
- Support QOS, STP/RSTP, IGMP, DHCP, SNMP, WEB, VLAN, ERPS etc.;
- Switching capacity:256Gbps, MAC table:8K;

▶ Specifications:

Model	Sepitam-PS620G-QCDFM
Fixed Port	20*10/100/1000Base-T PoE ports (Data/Power), 4* 10/100/1000 combo port (Data/Power), 2*100/1000SFP ports (Data) , 1 * RS232 console port (115200, N,8,1)
Ethernet Port	10/100/1000Base-T(X), auto-sensing, Full/half duplex MDI/MDI-X self-adaption
Twisted Pair Transmission	10BASE-T: Cat3,4,5 UTP (≤100 meter) 100BASE-TX: Cat5 or later UTP (≤100 meter) 1000BASE-T: Cat5e or later UTP (≤100 meter)
SFP Slot Port	Gigabit SFP optical fiber interface, default matching optical modules (optional order single-mode / multi-mode, single fiber / dual fiber optical module. LC)
Optical Cable	Multi-mode: 850nm 0 ~ 550M, single mode: 1310nm 0 ~ 40KM, 1550nm 0 ~ 120KM.
Network Management	Support to IGMP v1/v2/v3;
Network Protocol	IEEE802.3 10BASE-T; IEEE802.3i 10Base-T; IEEE802.3u 100Base-TX; IEEE802.3ab 1000Base-T; IEEE802.3z 1000Base-X; IEEE802.3x
Forwarding Mode	Store and Forward (Full Wire Speed)



Model	Sepitam-PS620G-QCDFM
Switching Capacity	256Gbps (Non-blocking)
Forwarding Rate @64byte	26.78Mpps
MAC	8K
Buffer Memory	6M
Jumbo Frame	9.6K
Working Environment	Working temperature: -20°C~55°C; Storage temperature: -20°~ 75°C; Working Humidity: 10%~90%, no condensation; Storage Humidity: 5% ~ 90%, no condensation; Working Altitude: 3000 meters (10,000ft); Storage Altitude: 3000 meters (10,000ft)
Radiation	CE mark, commercial FCC Part 15 Class B VCCI Class B EN 55022 (CISPR 22), Class B
Safety	CE Mark ,commercial CE/LVD EN60950,RoHS
LED Indicator	Power: PWR (green), system: SYS (yellow), network: Link (yellow), fiber port: L/A (green), PoE: PoE (green), rate: Speed (green)
Reset Switch	Yes, One-button factory reset
Power Supply Pin	Default 1/2 (+), 3/6 (-)
Max Power Per Port	30W; IEEE802.3af/at
Total PWR / Input Voltage	400W (AC100-160V)
PoE Port	Port 1 to 24,IEEE802.3af/at @ POE



Model	Sepitam-PS620G-QCDFM
PoE Management	<p>Total power limit of PoE power supply</p> <p>PoE output power allocation, off& af & at PoE output priority configuration</p> <p>PoE working status</p> <p>Delay start of power supply</p> <p>Scheduling of PoE operation and time</p>
Power Consumption	Standby<16W, Full Load<160W
Power Supply	Built-in power supply, AC 100~160V 50-60Hz 4.1A
Operation TEMP /Humidity	-20~+55°C, 5%~90% RH Non condensing
Storage TEMP / Humidity	-40~+75°C, 5%~95% RH Non condensing
Dimension (L*W*H)	440*290*44.5mm
Net / Gross Weight	<4.5kg / <5.5kg
Installation	Desktop, 19-inch 1U cabinet
Lightning protection / protection level	Lightning protection: 4KV 8/20us; Protection level: IP30
Certification	CCC, CE mark, commercial; CE/LVD EN60950; FCC Part 15 Class B; RoHS
Interface	<p>IEEE802.3X (Full-duplex)</p> <p>Port temperature protection setting</p> <p>Port green Ethernet Energy-saving setting</p> <p>Broadcast storm control based on port speed</p> <p>The speed limit of the message flow in the access port</p> <p>The minimum particle size is 64Kbps.</p>




Model	Sepitam-PS620G-QCDFM
Layer 3 Features	L2+ network management, IPV4/IPV6 management L3 soft routing forwarding, Static route, Default route @ 128 pcs, APR @ 1016 pcs
VLAN	4K VLAN based on port, IEEE802.1q VLAN based on the protocol VLAN based on MAC Voice VLAN, QinQ configuration Port configuration of Access, Trunk, Hybrid
Port Aggregation	LACP, Static aggregation Max 9 aggregation groups and 8 ports per group.
Spanning Tree	STP (IEEE802.1d), RSTP (IEEE802.1w), MSTP (IEEE802.1s)
Industrial Ring Network Protocol	G.8032 (ERPS), Recovery time less than 20ms 250 Ring at most, Max 254 devices per ring.
Multicast	MLD Snooping v1/v2, Multicast VLAN IGMP Snooping v1/v2, Max 250 multicast groups, Fast log out
Port Mirroring	Bidirectional data mirroring based on port
QoS	Flow-based Rate Limiting Flow-based Packet Filtering 8*Output queues of each port 802.1p/DSCP priority mapping Diff-Serv QoS, Priority Mark/Remark Queue Scheduling Algorithm (SP, WRR, SP+WRR)
ACL	Port-based Issuing ACL, ACL based on port and VLAN L2 to L4 packet filtering, matching first 80 bytes message. Provide ACL based on MAC, Destination MAC address, IP Source, Destination IP, IP Protocol Type, TCP/UDP Port, TCP/UDP Port Range, and VLAN, etc.
DHCP	DHCP Client, DHCP Snooping, DHCP Server, DHCP Relay



Model	Sepitam-PS620G-QCDFM
Security	<p>IP-MAC-VLAN-Port binding</p> <p>ARP inspection, Anti-DoS attack</p> <p>AAA & RADIUS, MAC learning limit</p> <p>Mac black holes, IP source protection</p> <p>IEEE802.1X & MAC address authentication</p> <p>Broadcast storm control, Backup for host datum</p> <p>SSH 2.0, SSL, Port isolation, ARP message speed limit</p> <p>User hierarchical management and password protection</p>
Management	<p>One-key recovery</p> <p>Cable Diagnose, LLDP</p> <p>Web Management (HTTPS)</p> <p>NTP, System work log, Ping Test</p> <p>CPU instant utilization status view</p> <p>Console/AUX Modem/Telnet/SSH2.0 CLI</p> <p>Download & Management on FTP, TFTP, Xmodem, SFTP, SNMP V1/V2C/V3</p> <p>NMS - smart network management system platform (LLDP+SNMP)</p>
System	<p>Category 5 Ethernet network cable</p> <p>Web browser: Mozilla Firefox 2.5 or higher, Google browser chrome V42 or higher,</p> <p>Microsoft Internet Explorer10 or later;</p> <p>TCP/IP, network adapter, and network operating system (such as Microsoft Windows, Linux, or Mac OS X) installed on each computer in a network</p>

Technical Specification of Sepitam-PS620G-QCDFM

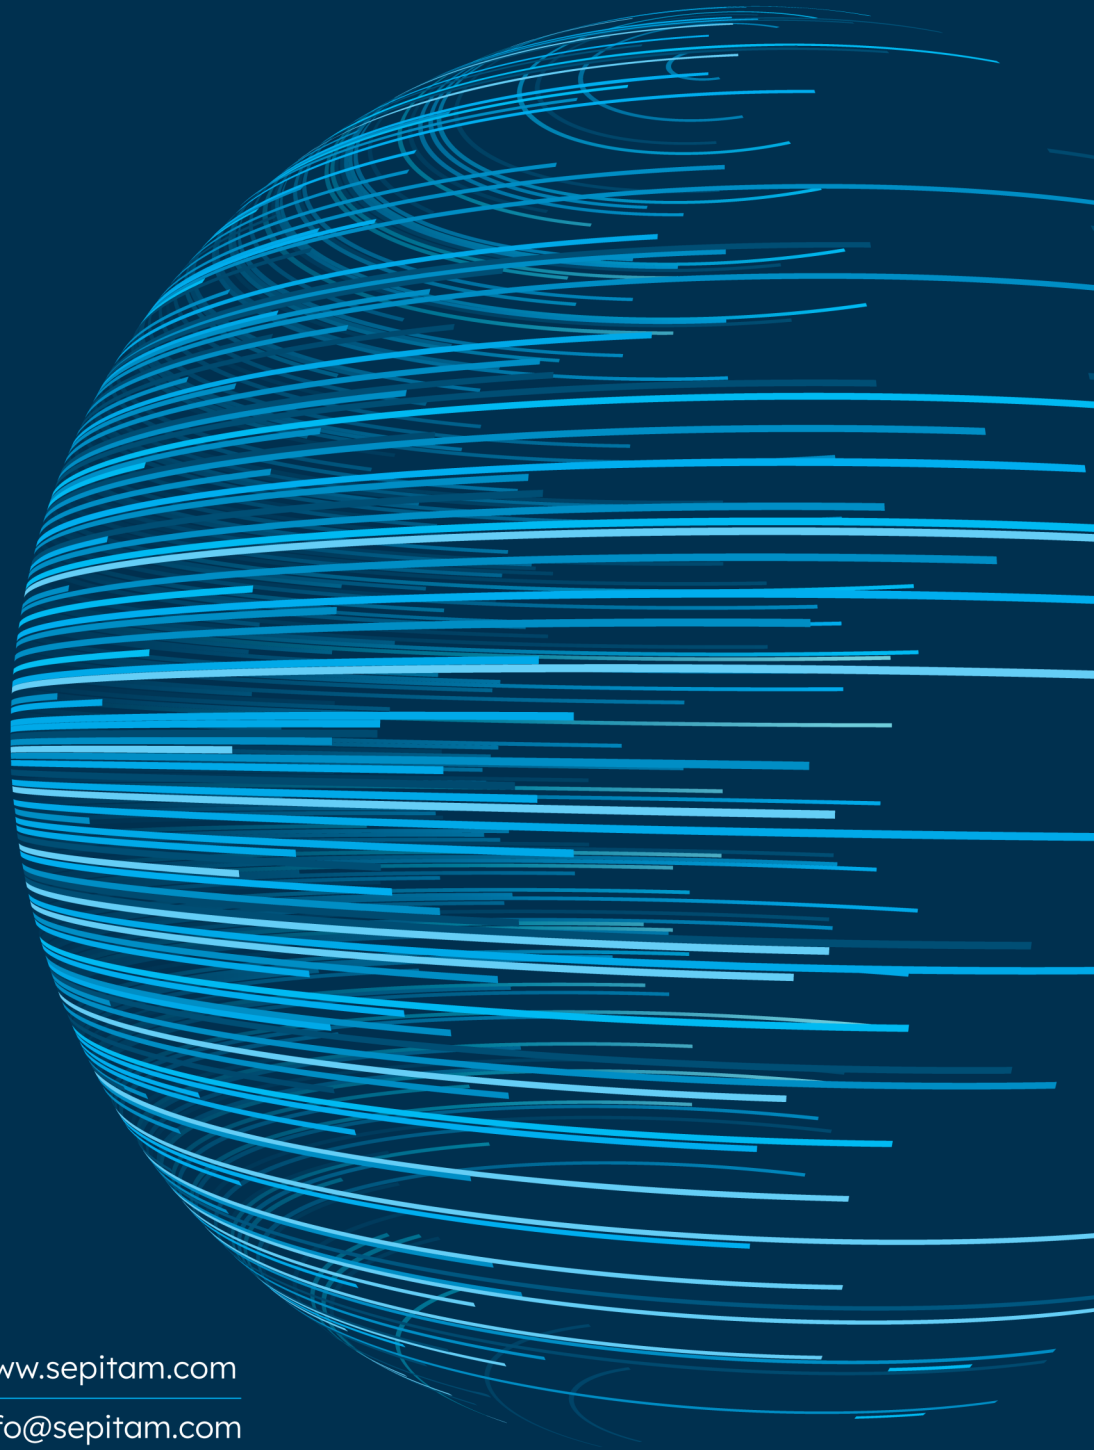

www.sepitam.com

Info@sepitam.com