



SEPITAM

ONE STEP SMARTER

www.sepitam.com

SEPITAM
1USB2.0-T/R



TYPE:

Sepitam-1USB2.0-T/R

Sepitam fiber optic and Ethernet converters are engineered to support the seamless transmission of various services, including FXO/FXS, E1, audio, analog video, HDMI, USB, and serial data. Whether deployed over fiber optic or Ethernet networks, our solutions ensure reliable, high-quality communication for a wide range of applications.



- ▶ TYPE: Sepitam-1USB2.0-T/R
- ▶ Technical Specification of Sepitam-1USB2.0-T/R
- ▶ 4Port USB 2.0 on 1Port USB 2.0 With Fiber Converter

▶ Description:

This series of USB 2.0 fiber modem consists of a transmitter and a receiver. The USB interface(USB2.0) of the host computer is extended to a remote terminal and expanded to four USB ports through a single-mode or multi-mode optical fiber. Maximum transmission distance is 10KM(single mode fiber). Support USB1.1 and 2.0 type high-speed cameras, hard disk drives, printers, scanners, audio devices, touch screens, game controllers and other devices. This product can be applied in video conference, multimedia information publishing, governments departments, medical systems, commercial displays, multimedia function rooms, security monitoring, utilities and other fields.

▶ Properties:


- Compatible with USB2.0 and USB1.1 protocols, support USB cameras, printers, USB flash drives, scanners, touch screens and other devices;
- Automatic recognition of high-speed(25Mbps~480Mbps), full-speed(500Kbps to 12Mbps), and low-speed(10Kbps to 1.5Mbps) USB devices;
- Optical fiber transmission distance 10KM(single mode fiber);
- The optical fiber extends to the remote end and expands to four USB ports, total current up to 2000mA;
- Fiber transmission, no drive, compatible with any system, plug and play;
- A variety of power supply options: AC220V, DC-48V/DC24V, etc.



► Specifications:

Model	Sepitam-1USB2.0-T/R
Optical interface	Number of Fiber Ports: 1 Fiber core: Single fiber/Dual fiber Connector: FC/SC/ST/LC(SFP) Wavelength: 850nm/1310nm multi mode; 1310nm/1550nm single mode Transmission distance: 0~10Km
Typical output power	Single mode: 1310/1550nm: >-9dBm Multi-mode: 850nm:-18dBm Multi-mode: 1310nm:-25dBm Receiver Sensitivity: -28dBm-- 40dBm
Environmental indicators	Operating temperature: -10℃ - +60℃ Storage temperature: -40℃ - +85℃ Humidity: 0% -95% (non-condensing) MTBF:> 100,000 hours
Standard: USB2.0	High-speed (25Mbps~480Mbps) Full-speed (500Kbps~12Mbps) Low-speed (10Kbps~1.5Mbps) Total current: Max up to 2000mA
Product Function Description	Transmit one USB2.0, and expand to four USB interfaces at the remote end
Business port description	1 fiber interface 1USB2.0 interface
power supply	AC220V or DC-48V (optional power supply), support for redundant power backup
Dimensions (L × W × H)	140*110*31 mm Desktop
Weight	0.75Kg / PCS

Technical Specification of Sepitam-1USB2.0-T/R

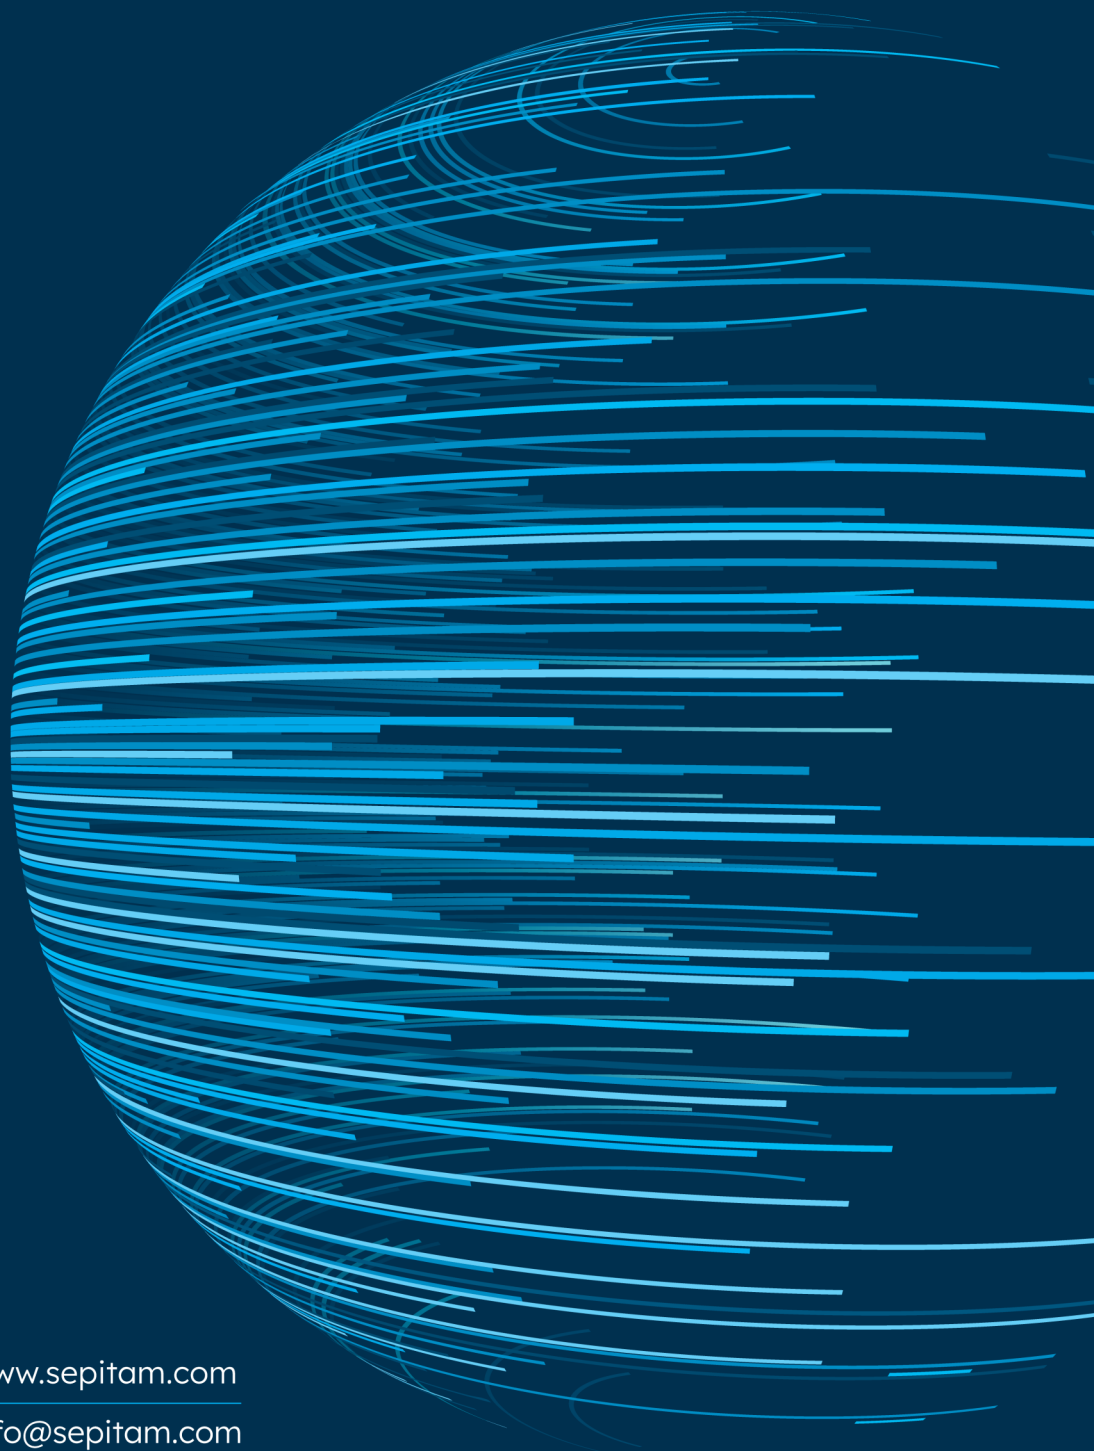

www.sepitam.com

Info@sepitam.com