



**SEPITAM**

ONE STEP SMARTER

---

[www.sepitam.com](http://www.sepitam.com)

**SEPITAM**  
**FS1628F-12GQXM**



TYPE:

## Sepitam-FS1628F-12GQXM

Sepitam enterprise-grade switches are available in managed, unmanaged, PoE, and non-PoE models. The advanced PoE technology simplifies powering various network devices, and high-capacity switches enhance network scalability. With robust management features, these switches enable Layer 2 protocol configurations, delivering superior network efficiency and security.



- ▶ TYPE: Sepitam-FS1628F-12GQXM
- ▶ Technical Specification of Sepitam-FS1628F-12GQXM
- ▶ 28\*10/100/100Base-X SFP fiber ports & 12\*10/100/1000Base-T RJ45  
+ 4\*10Gbps SFP+ ports enterprise managed switch

## ▶ Description:

The Sepitam-FS1628F-12GQXM is a L2+ managed core Ethernet switch, with 12\*10/100/1000Mbps RJ45 ports +28\*100M/1000Mbps SFP slot ports +4\*10Gbps SFP+ slot ports. Sepitam-FS1628F-12GQXM support static routing forwarding, support complete security protection mechanism, perfect ACL/QoS strategy and rich VLAN function, easy to manage and maintain. Support multiple network redundancy protocols STP/RSTP/MSTP (<50ms) and (ITU-T G.8032) ERPS to improve link backup and network reliability. When one-way network fails, communication can be recovered quickly to ensure uninterrupted communication of important applications. According to the actual application needs, through Web network management mode, PoE power management, port traffic control, VLAN partition, SNMP and other functions of a variety of application business configuration.

## ▶ Properties:

- 12\*10/100/1000Mbps RJ45 ports+28\*1000Mbps SFP fiber port+4\*10G(SFP+) fiber ports  
Managed Ethernet Convergence/Core switch;
- Bandwidth:598Gbps, Packet forwarding cache:32M;
- Support QOS, STP/RSTP, IGMP, DHCP, SNMP, WEB, VLAN, ERPS etc.;
- Compatible with 1U rack, built-in internal power adapter;
- Support spanning tree STP (802.1D) and RSTP(802.1W);



## ► Specifications:

Model	Sepitam-FS1628F-12GQXM
Interfaces	12*10/100/1000Mbps RJ45 ports (Data); 28*100/1000Mbps SFP ports (Data) 4*1/10G SFP+ uplink fiber ports (Data)
Network Managed Tape	L2+
Network Protocol	IEEE802.3 10BASE-T; IEEE802.3i 10Base-T; IEEE802.3u 100Base-TX; IEEE802.3ab 1000Base-T; IEEE802.3z 1000Base-LX/SX/CX; IEEE802.3ae 10GBase-SR/LR; IEEE802.3x
Ethernet Port Feature	Port1-12 10/100/1000Base-T, auto-sensing, full/half duplex MDI/MDI-X self-adaption
SFP Port Characteristic	Gigabit/10 Gigabit SFP fiber interface, default matching fiber modules, need to buy separately, (optional single-mode/multi-mode, single fiber / dual fiber module, LC)
Forwarding Mode	Store and Forward (Full Wire Speed)
Switching Capacity	598Gbps
Forwarding Rate@64byte	119.04Mpps
MAC Address Table	32K
Buffer Memory	32M
Twisted Pair transmission	10BASE-T: Cat3,4,5 UTP (≤100 meter) ;100BASE-TX: Cat5 or later UTP (≤100meter) ; 1000BASE-T: Cat6 or later UTP (≤100 meter)
Optical cable	Multi-mode:850nm 0~300M(10G),850nm 0~550M (1.25G) Single-mode:1310nm 0~40KM,1550nm 0~120KM.
Total PWR / Input Voltage	60W/(AC100-240V)



Model	Sepitam-FS1628F-12GQXM
Power Consumption	Standby:<20W; full load:<40W
LED	Power indicator: PWR (yellow), System indicator: SYS (yellow), Network indicator: Link/Act (yellow), fiber port: L/A(green)
Reset switch	Support one key to restore factory settings
Power Supply	Built-in power supply; AC:100 ~240V 50-60Hz
Operation TEMP / Humidity	-20~+55°C;5%~90% RH Non condensing
Storage TEMP / Humidity	-40~+80°C;5%~95% RH Non condensing
Dimension (L*W*H)	440*290*44.5mm
Net /Gross Weight	<4kg /<5kg
Installation Method	Desktop.19-inch 1U cabinet installation
Anti-surge / Protection Level	Anti-surge: 4KV 8/20us; Protection Level: IP30
Certification	CCC; CE mark, commercial;CE/LVD EN60950; FCC Part 15 Class B; RoHS;
Interface	IEEE802.3x flow control (full duplex) Broadcast storm suppression for port rate support speed limit for incoming and offline message traffic, with a minimum particle size of 64Kbps. Temperature protection setting Energy saving configuration of port IEEE Ethernet
Layer3 Function	L2+ network management function layer3 software is non line speed forwarding, supporting different network segments communication between different VLAN Static routing / default routing, 128 maximum entries ARP protocol, 1024 maximum entries




Model	Sepitam-FS1628F-12GQXM
VLAN	<p>Support port based VLAN (4K), IEEE802.1q</p> <p>Support protocol based VLAN</p> <p>Support Access, Trunk, Hybrid three types of port configuration</p> <p>Support QinQ configuration</p>
Port Aggregation	<p>Support LACP</p> <p>Support static polymerization</p> <p>Support the largest 8 aggregation groups, each aggregation group supports 8 ports.</p>
Spanning Tree	<p>STP (IEEE802.1d)</p> <p>RSTP(IEEE802.1w) MSTP(IEEE802.1s)</p>
Industrial Ring Network Protocol	<p>Support G.8032 (ERPS), support 255 loops at most, and supports 1024 devices per ring.</p> <p>The self-healing time of the ring network is less than 20ms</p>
Multicast	<p>Support IGMP Snooping V1/V2 and support 1024 multicast groups at most.</p> <p>Support the user's quick departure mechanism</p> <p>Support MLD Snooping V1/V2</p> <p>Support multicast VLAN</p>
Image	<p>Bi-directional traffic mirroring supporting the basic port</p>
QoS	<p>Diff-Serv QoS</p> <p>Each port supports 8 output queues</p> <p>Support 802.1p/DSCP priority mapping</p> <p>Support queue scheduling mechanism (SP, WRR, SP+WRR)</p> <p>priority tag Mark/Remark</p> <p>stream based packet filtering</p> <p>Support for stream-based redirection</p> <p>Support flow-based speed limit</p>
ACL	<p>Support L2 to L4 packet filtering function, can match the first 80 bytes of the message, provide based on the source MAC address, destination MAC address, source IP address, destination IP address, IP protocol type, TCP/UDP port, TCP/UDP port range, VLAN and other definition ACL.</p> <p>Support ACL based on port and VLAN</p>



Model	Sepitam-FS1628F-12GQXM
Safety Characteristics	<p>Support user grading management and password protection</p> <p>Support IEEE802.1X authentication / centralized MAC address authentication</p> <p>Support AAA&amp;RADIUS authentication</p> <p>Support the number of MAC address learning restrictions</p> <p>Support MAC address black hole</p> <p>Support SSH 2 to provide secure passwords for user login.</p> <p>Support SSL to ensure data transmission security Support port isolation</p> <p>Support the speed limit function of ARP message</p> <p>Support IP source address protection</p> <p>Support ARP intrusion detection function</p> <p>Support against DoS attacks</p> <p>Support port broadcast message suppression</p> <p>Support host data backup mechanism</p>
DHCP	DHCP Client
System Requirements	<p>Web browser: Mozilla Firefox 2.5 or higher, Google browser chrome V42 or higher, Microsoft Internet Explorer10 or later;</p> <p>5 types and above Ethernet cable;</p> <p>TCP/ IP, network adapter and network operating system (such as Microsoft Windows,</p>
Layer3 Function	<p>L2+ network management function</p> <p>layer3 software is non line speed forwarding, supporting different network segments communication between different VLAN</p> <p>Static routing / default routing, 128 maximum entries</p> <p>ARP protocol, 1024 maximum entries</p>



# Technical Specification of Sepitam-FS1628F-12GQXM

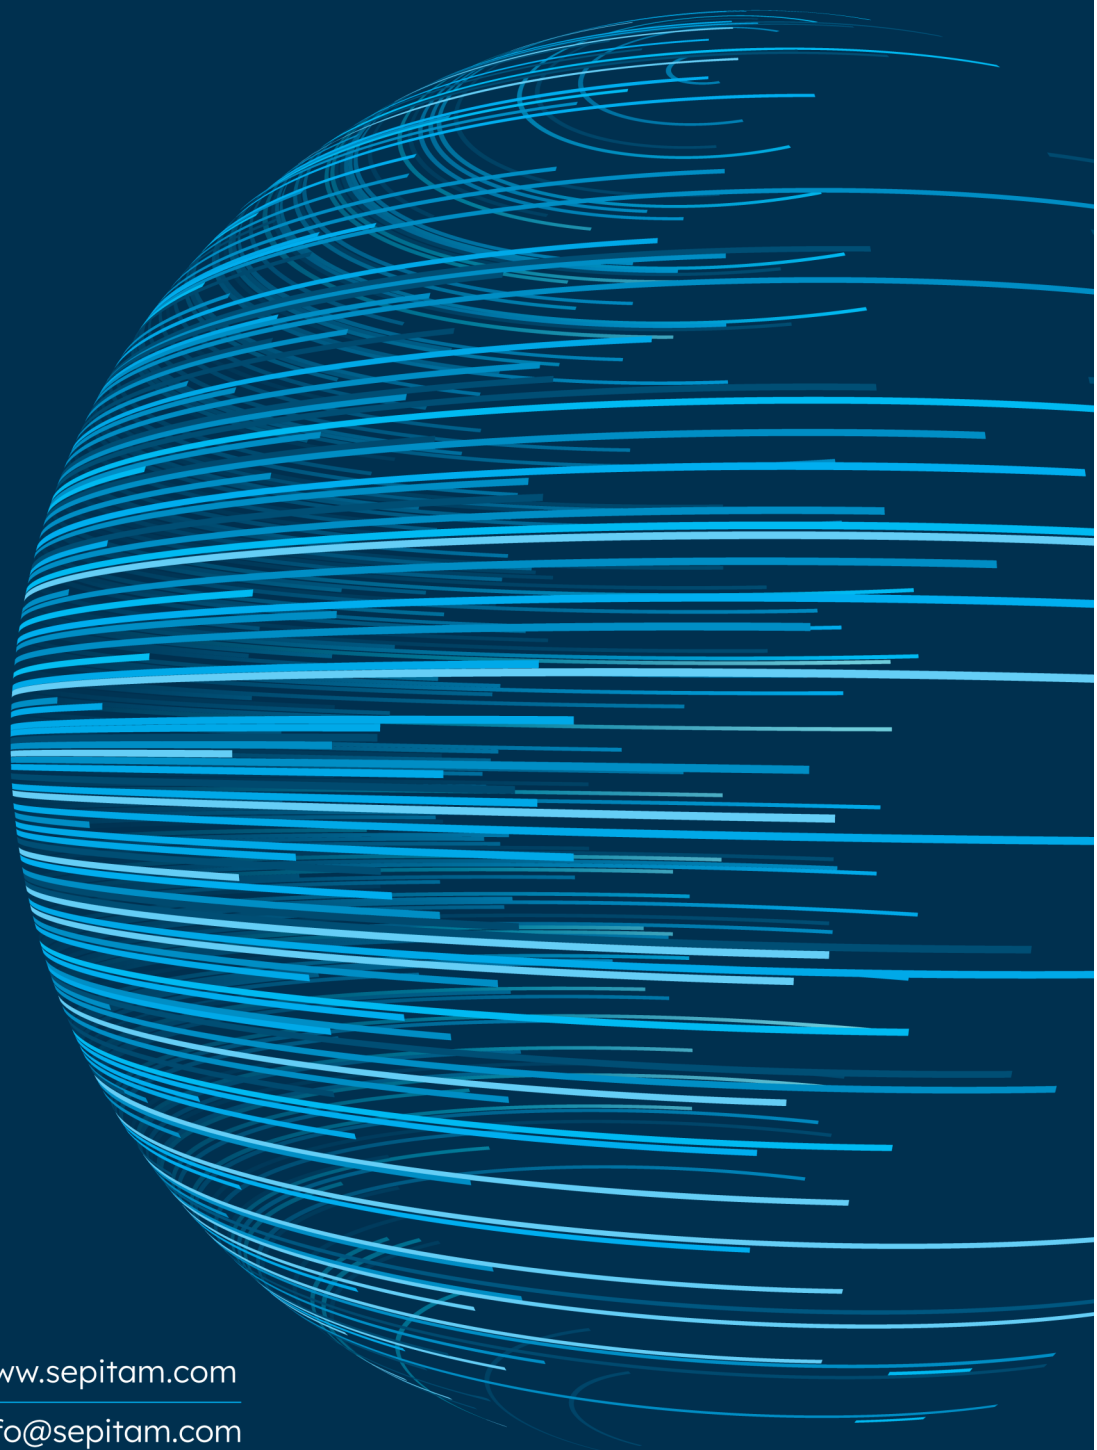

[www.sepitam.com](http://www.sepitam.com)

[Info@sepitam.com](mailto:Info@sepitam.com)